
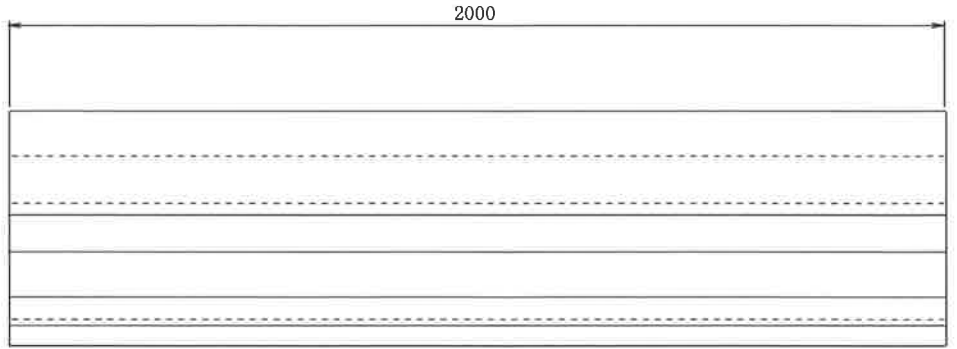




片土止め・落ちふた式U形側溝

(標準・防音)




標準 250×250×2000 H=100 参考重量405kg

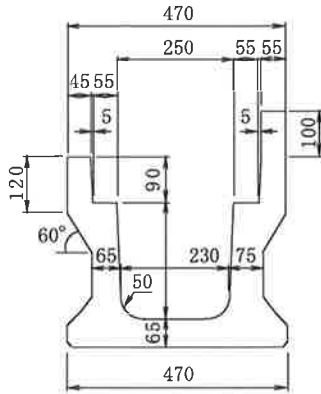



標準 250×250×2000 H=200 参考重量430kg

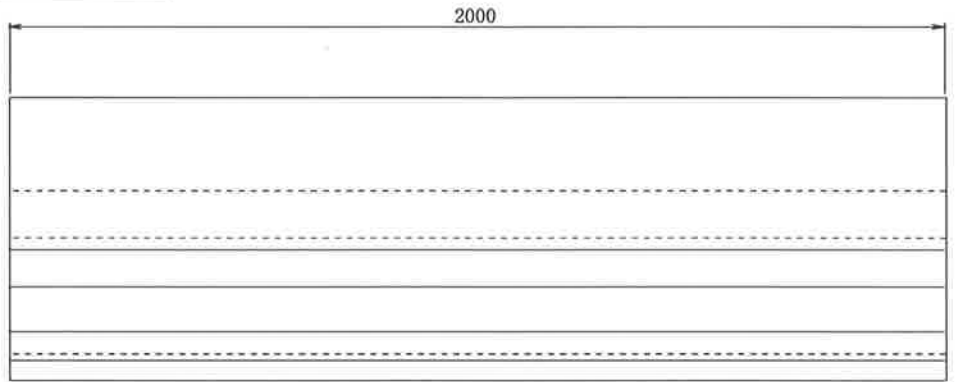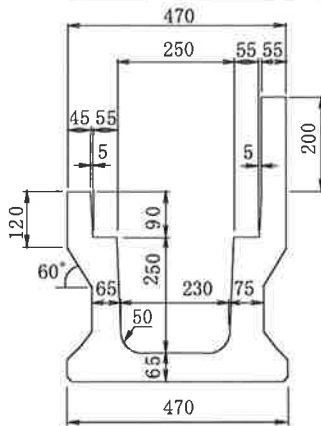

防音 250×250×2000 標準 H=100 参考重量405kg

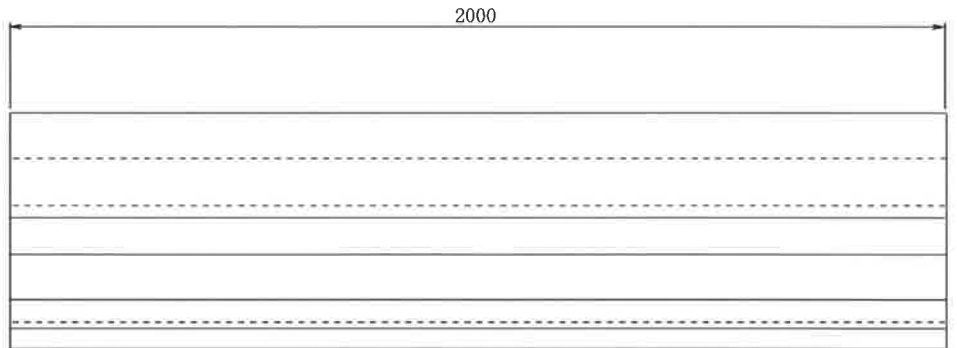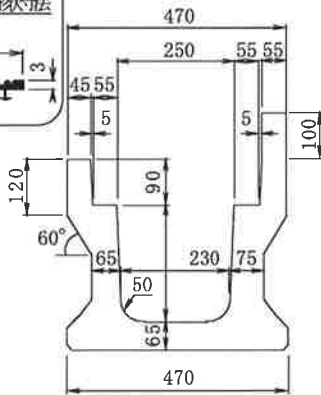



防音 250×250×2000 標準 H=200 参考重量430kg

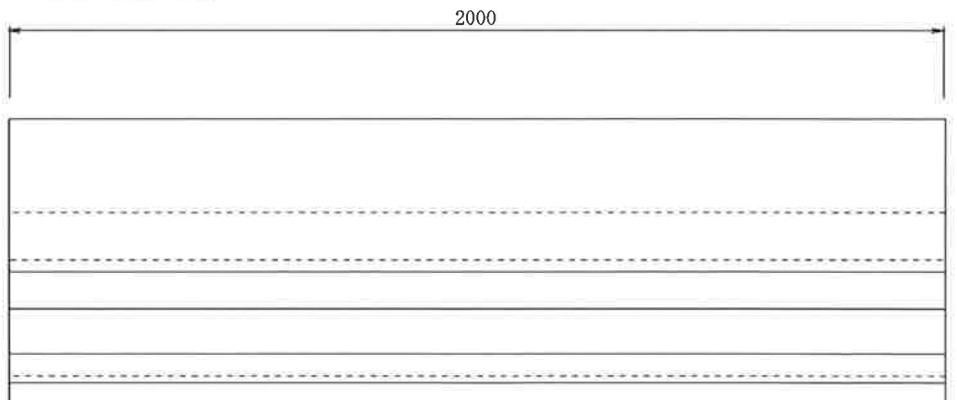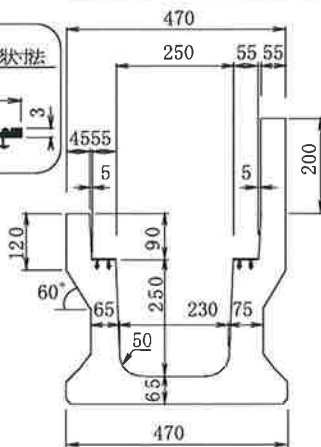



片土止め・落ちふた式U形側溝

(標準)

250×600×2000 H=100 参考重量662kg

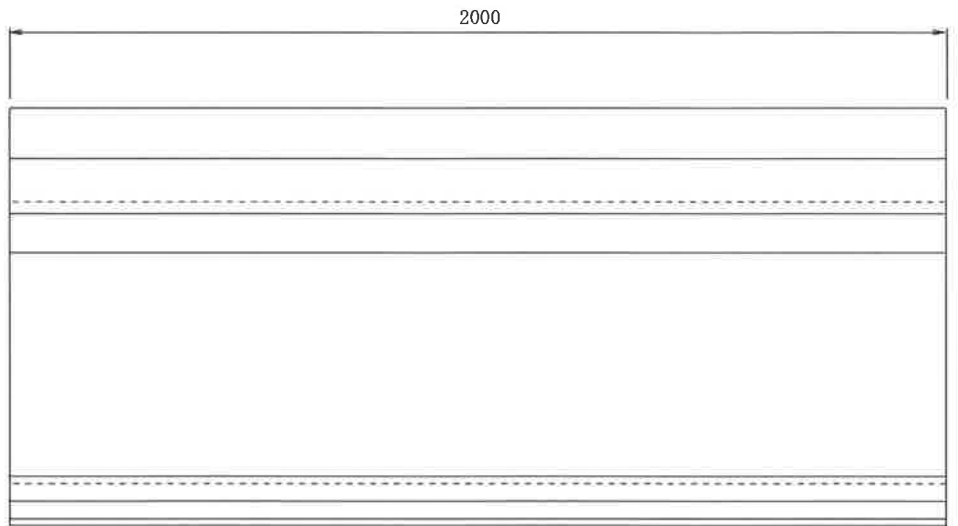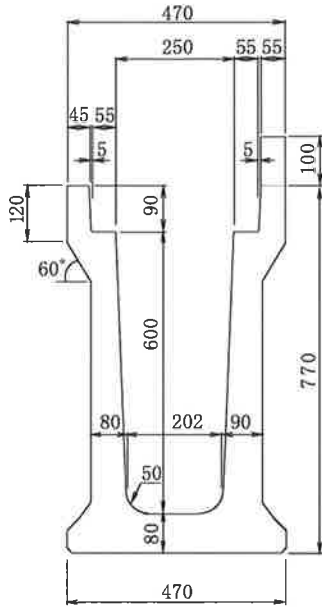


250×600×2000 H=200 参考重量688kg

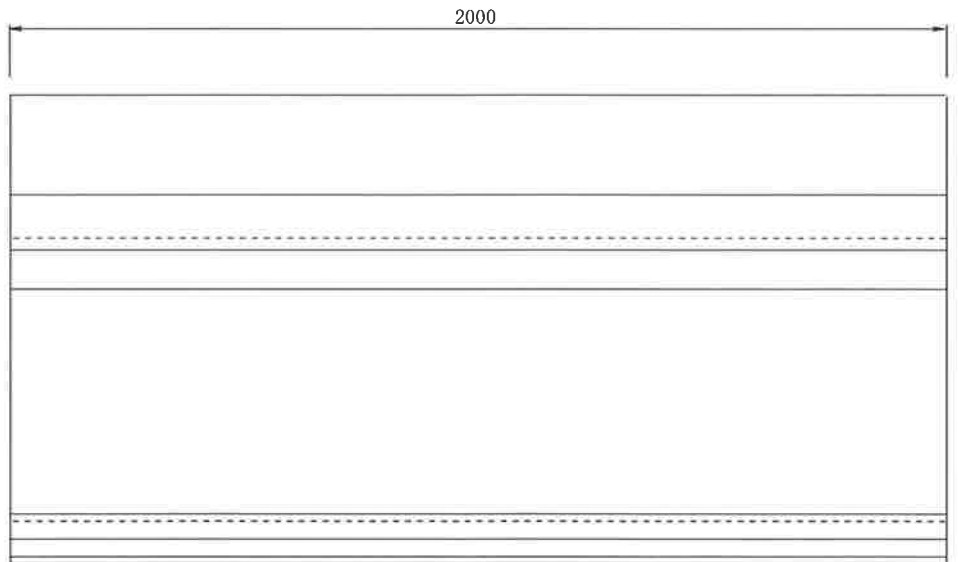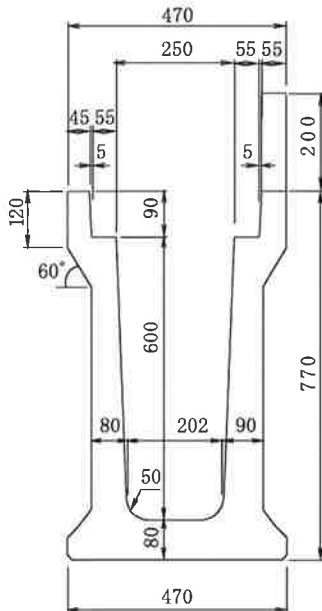

片土止め・落ちふた式U形側溝

(防音)

250×600×2000 H=100 参考重量662kg

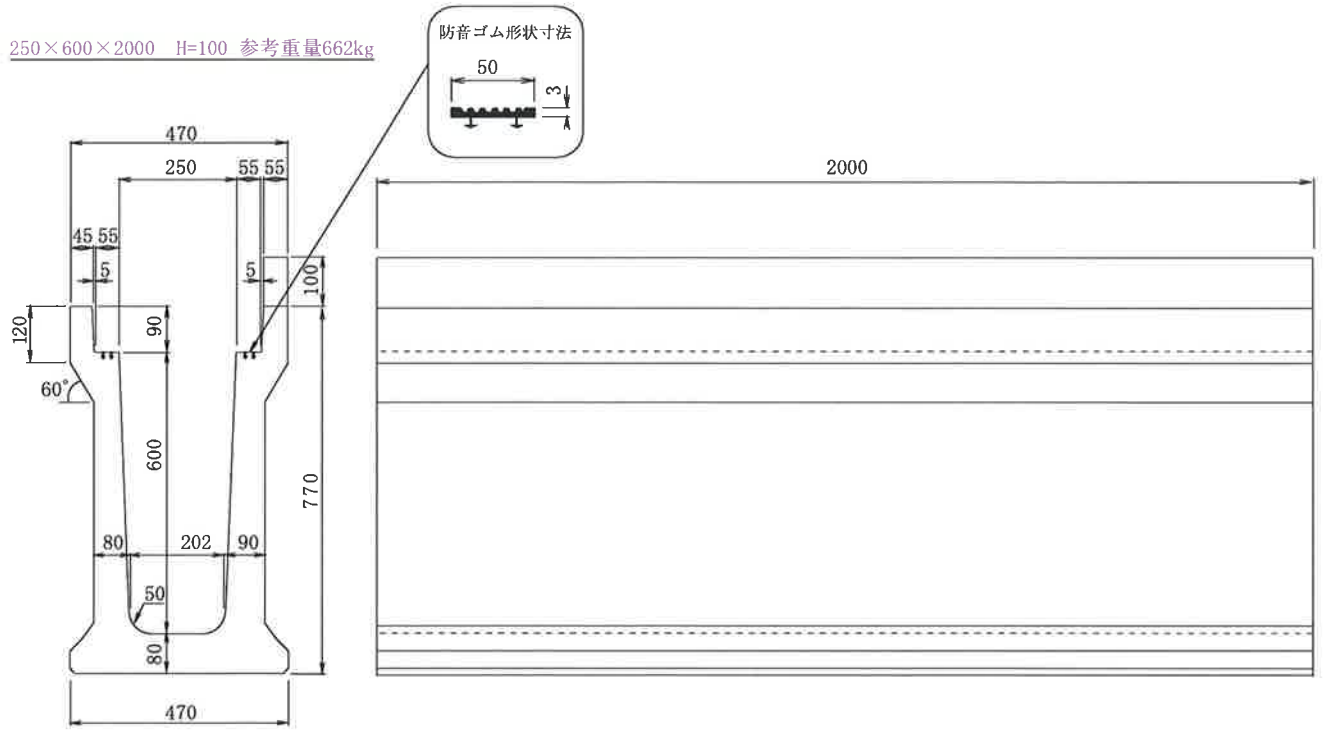

250×600×2000 H=200 参考重量688kg

