
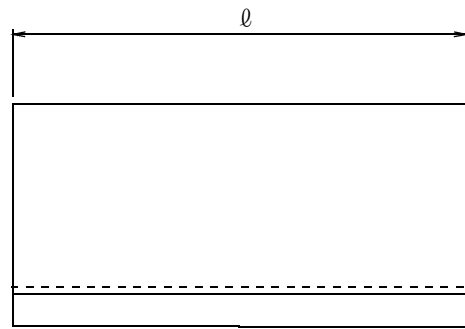



鉄筋コンクリートU形本体・ふた

例：呼び 600

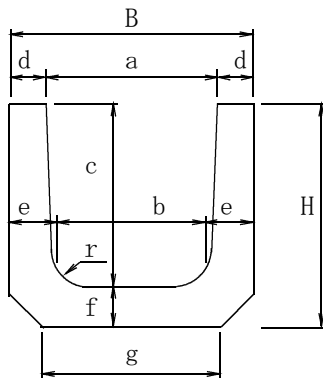

呼 び	寸 法 (mm)										参考重量	
	a	b	c	d	e	f	g	r	ℓ	B		H
150	150	140	150	30	35	35	160	30	600	210	185	24
180	180	170	180	35	40	40	190	50		250	220	34
240	240	220	240	45	50	50	240	65		330	290	55
300A	300	260	300	50	60	60	300			400	300	70
300B										360	79	
300C								360		425	92	
360A	360	310	300	65	65	360	70	460		365	90	
360B			360							425	100	
450	450	400	450	55	70	70	430	70		560	520	134
600	600	540	600	70	80	80	600	70		740	680	209

例：呼び 240 ℓ=500

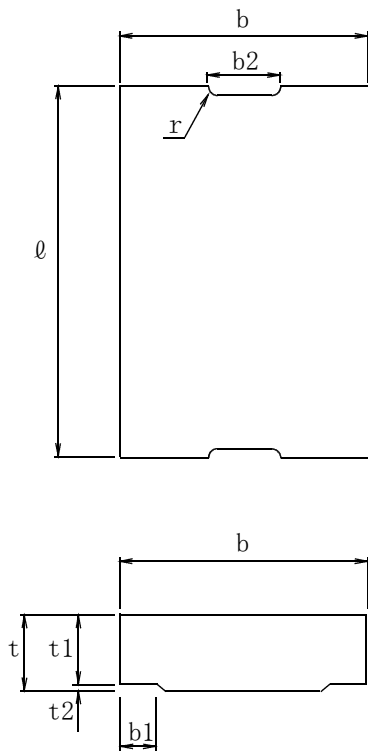

呼 び	寸 法 (mm)								参考重量	
	b	b1	b2	t	t1	t2	r	ℓ		
1-150	210	35	75	35	30	5	15	600	10	
1-180	250	40		40	35				14	
1-240	330	50	90	45	40				20	
1-300	400	55	100	60	50	10	18		32	
1-360	460			65	55				41	
1-450	560	60	120	70	60	54				
1-600	740	75		150	75	65	77			
2-150	210	35	75	90	80	10	15		600	26
2-180	250	40								31
2-240	330	50	90	100	85					15
2-240							500	38		
2-300	400	55	100	120	100	20	18	600		54
2-360	460							63		
2-450	560	60	150	150	130			92		
2-600	740	75						153		