



両面歩車道


標準

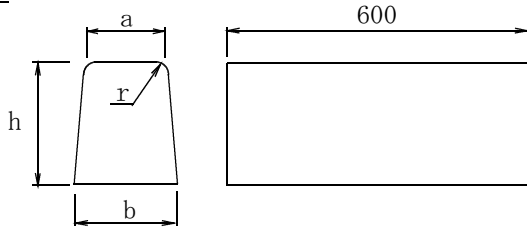

水抜


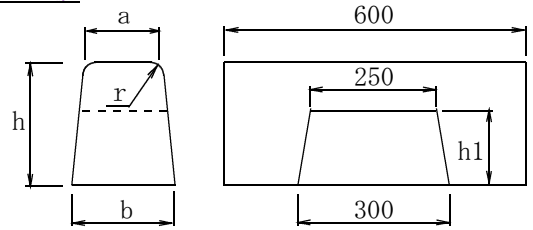


端部

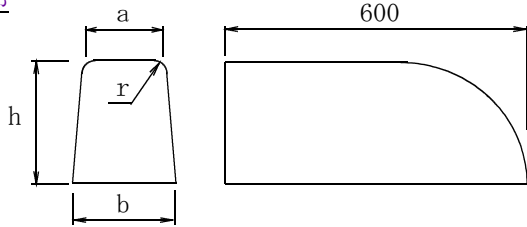

呼び	a	b	h	h1	r	φ	標準重量	水抜重量
FS-A	130	170	200	120	20	600	46	32
FS-B	155	205	250	150	30	600	70	49
FS-C	155	210	300	200	30	600	80	60


平(FD-A・C)

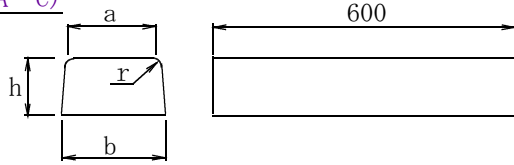

呼び	a	b	h	r	参考重量
FD-A (7cm)	163	170	70	20	17
FD-C (12cm)	190	210	120	20	33


呼び	1/4用	半径R(m)	2.0	2.5	3.0	3.5	4.0	5.0	参考重量
FD-C (12cm)	90°	使用本数	5.2	6.5	7.8	9.2	10.4	13.1	33

1段斜(FT-A・B・C)

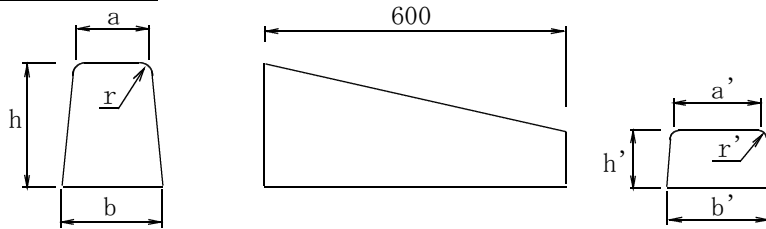


呼び	a	b	h	r	a'	b'	h'	r'	参考重量
FT-A (7cm)	130	170	200	20	163	170	70	20	32
FT-B (12cm)	155	205	250	30	190	205	120	30	55
FT-C (12cm)	155	210	300	30	190	205	120	30	56

3段斜(FT-C)

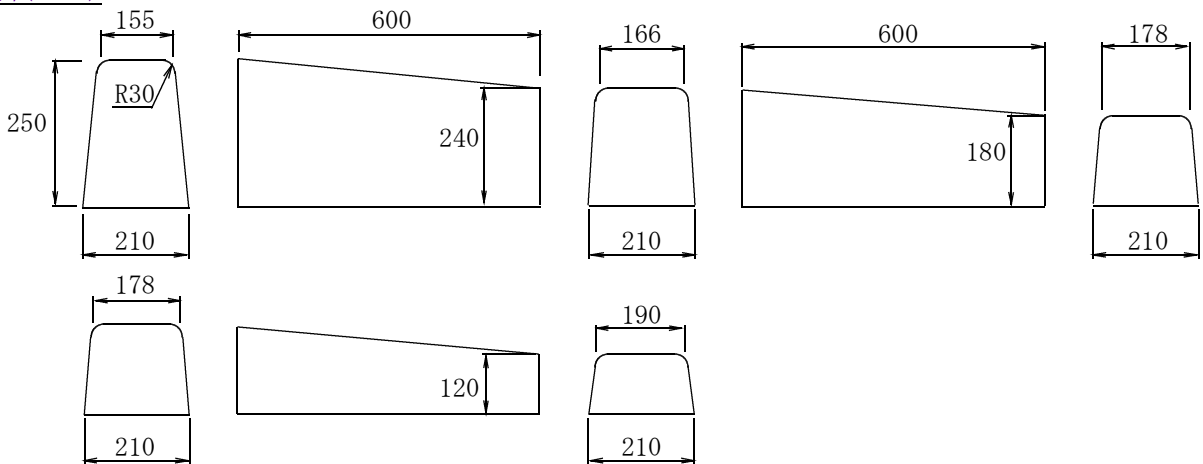

SFS-B (基本) 参考重量70kg

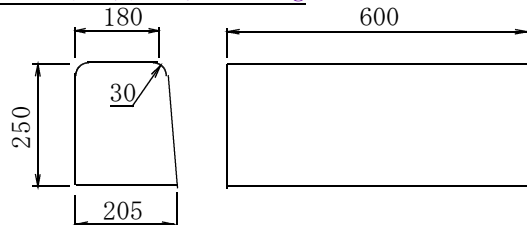

(水抜) 参考重量55kg

